

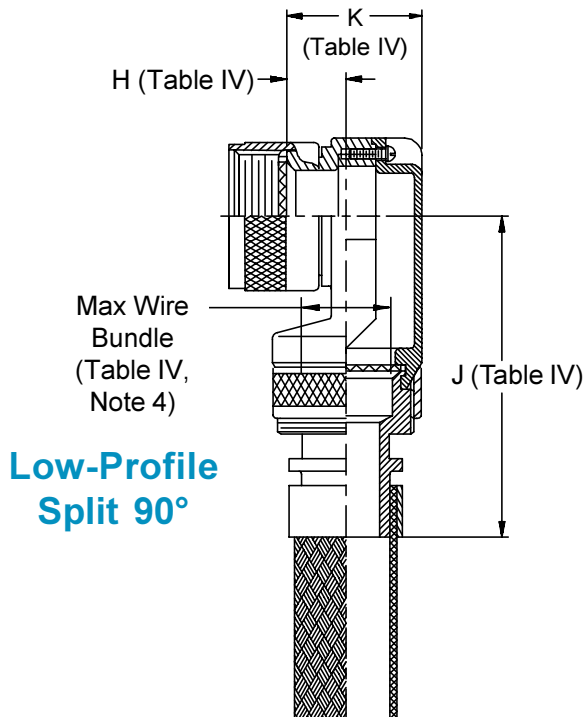
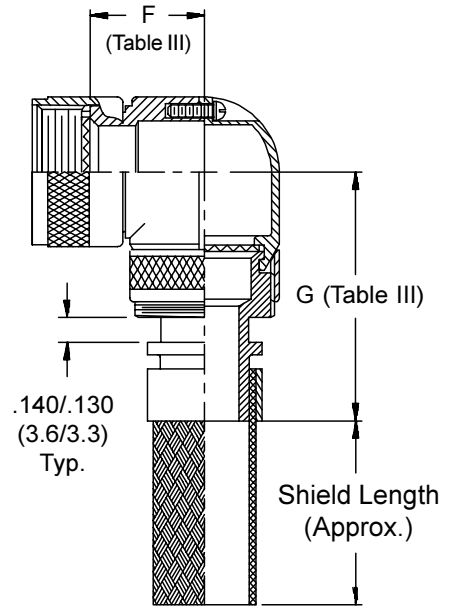
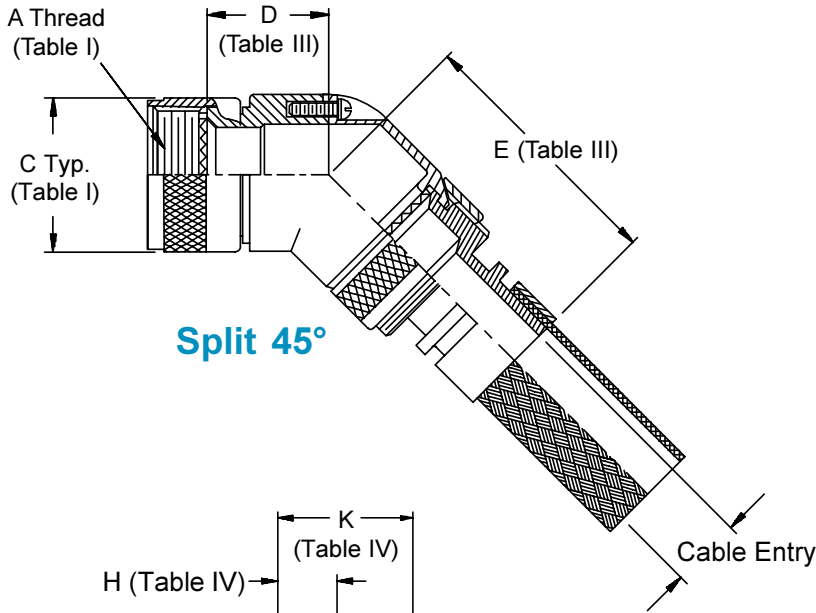


**CONNECTOR  
DESIGNATORS  
A-F-H-L-S  
ROTATABLE  
COUPLING**

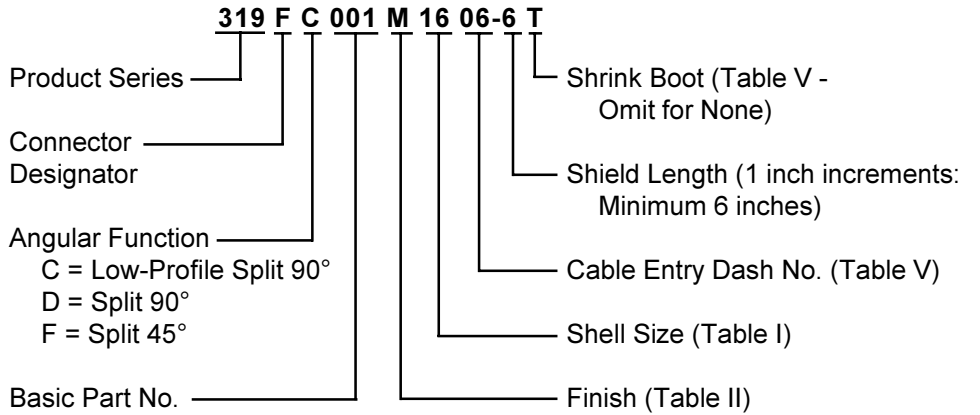

**STYLE 2  
(See Note 4)**

See inside back cover fold-out or pages 13 and 14 for Tables I and II.

| TABLE III - FUNCTIONS D AND F ONLY |    |             |              |              |              |  |
|------------------------------------|----|-------------|--------------|--------------|--------------|--|
| SHELL SIZE                         |    | D           | E            | F            | G            |  |
| A-F-L-S                            | H  | Max         | Max          | Max          | Max          |  |
| 08                                 | 09 | .440 (11.2) | 1.500 (38.1) | .680 (17.3)  | 1.440 (36.6) |  |
| 10                                 | 11 | .500 (12.7) | 1.560 (39.6) | .750 (19.1)  | 1.500 (38.1) |  |
| 12                                 | 13 | .560 (14.2) | 1.630 (41.4) | .810 (20.6)  | 1.570 (39.9) |  |
| 14                                 | 15 | .620 (15.7) | 1.660 (42.2) | .870 (22.1)  | 1.600 (40.6) |  |
| 16                                 | 17 | .680 (17.3) | 1.760 (44.7) | .930 (23.6)  | 1.700 (43.2) |  |
| 18                                 | 19 | .750 (19.1) | 1.820 (46.2) | 1.000 (25.4) | 1.760 (44.7) |  |
| 20                                 | 21 | .820 (20.8) | 1.880 (47.8) | 1.060 (26.9) | 1.820 (46.2) |  |
| 22                                 | 23 | .880 (22.4) | 1.940 (49.3) | 1.120 (28.4) | 1.880 (47.8) |  |
| 24                                 | 25 | .940 (23.9) | 2.000 (50.8) | 1.180 (30.3) | 1.940 (49.3) |  |





| TABLE IV - FUNCTION C ONLY |    |             |              |              |                 |
|----------------------------|----|-------------|--------------|--------------|-----------------|
| SHELL SIZE                 |    | H           | J            | K            | Max Wire Bundle |
| A-F-L-S                    | H  | Ref.        | Max          | Max          |                 |
| 08                         | 09 | .340 (8.6)  | 1.780 (45.2) | .681 (17.3)  | .250 (6.4)      |
| 10                         | 11 | .270 (6.9)  | 1.940 (49.3) | .731 (18.6)  | .375 (9.5)      |
| 12                         | 13 | .270 (6.9)  | 1.940 (49.3) | .731 (18.6)  | .375 (9.5)      |
| 14                         | 15 | .280 (7.1)  | 2.010 (51.1) | .831 (21.1)  | .500 (12.7)     |
| 16                         | 17 | .420 (10.7) | 2.060 (52.3) | .981 (24.9)  | .625 (15.9)     |
| 18                         | 19 | .640 (16.3) | 2.090 (53.1) | 1.181 (30.0) | .625 (15.9)     |
| 20                         | 21 | .640 (16.3) | 2.090 (53.1) | 1.181 (30.0) | .625 (15.9)     |
| 22                         | 23 | .540 (13.7) | 2.240 (56.9) | 1.181 (30.0) | .750 (19.1)     |
| 24                         | 25 | .540 (13.7) | 2.240 (56.9) | 1.181 (30.0) | .750 (19.1)     |

1. Cable Entry is defined as the accommodation range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.
2. See Shrink Boot Reference Information Sheet (pages 40 and 41).
3. Metric dimensions (mm) are indicated in parentheses.
4. When maximum entry (page 21) is exceeded, Style 2 will be supplied (not available for Function C). Dimensions D, E, F, & G will not apply. Please consult factory.

| TABLE V  |              |               |
|----------|--------------|---------------|
| Dash No. | Cable Entry  | Shrink Boot * |
| 01       | .188 (4.8)   | n/a           |
| 02       | .250 (6.4)   | 202K121-25-0  |
| 03       | .312 (7.9)   | 202K121-25-0  |
| 04       | .375 (9.5)   | 202K132-25-0  |
| 05       | .438 (11.1)  | 202K132-25-0  |
| 06       | .500 (12.7)  | 202K142-25-0  |
| 07       | .562 (14.3)  | 202K153-25-0  |
| 08       | .625 (15.9)  | 202K153-25-0  |
| 09       | .688 (17.5)  | 202K163-25-0  |
| 10       | .750 (19.1)  | 202K163-25-0  |
| 11       | .812 (20.6)  | 202K174-25-0  |
| 12       | .875 (22.2)  | 202K174-25-0  |
| 13       | .938 (23.8)  | 202K174-25-0  |
| 14       | 1.000 (25.4) | 202K185-25-0  |

\* Raychem Shrink Boot (Page 41)  
Supplied with "T" Option (see Part Number Development)

**CONNECTOR DESIGNATORS**  
**A-F-H-L-S**  
**SELF-LOCKING**  
**ROTATABLE COUPLING**

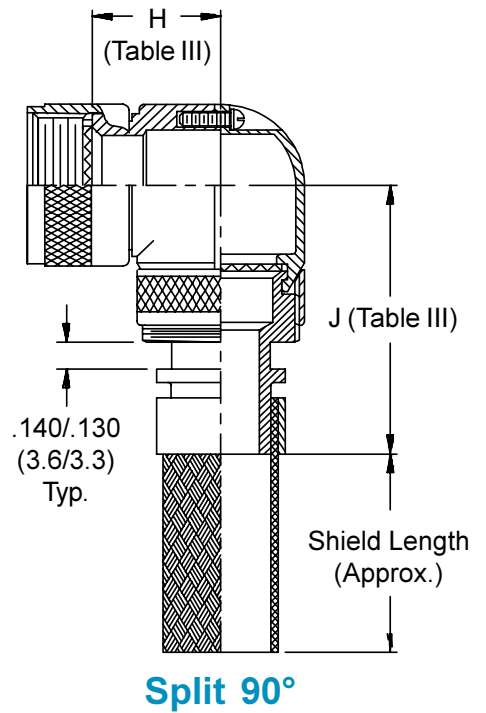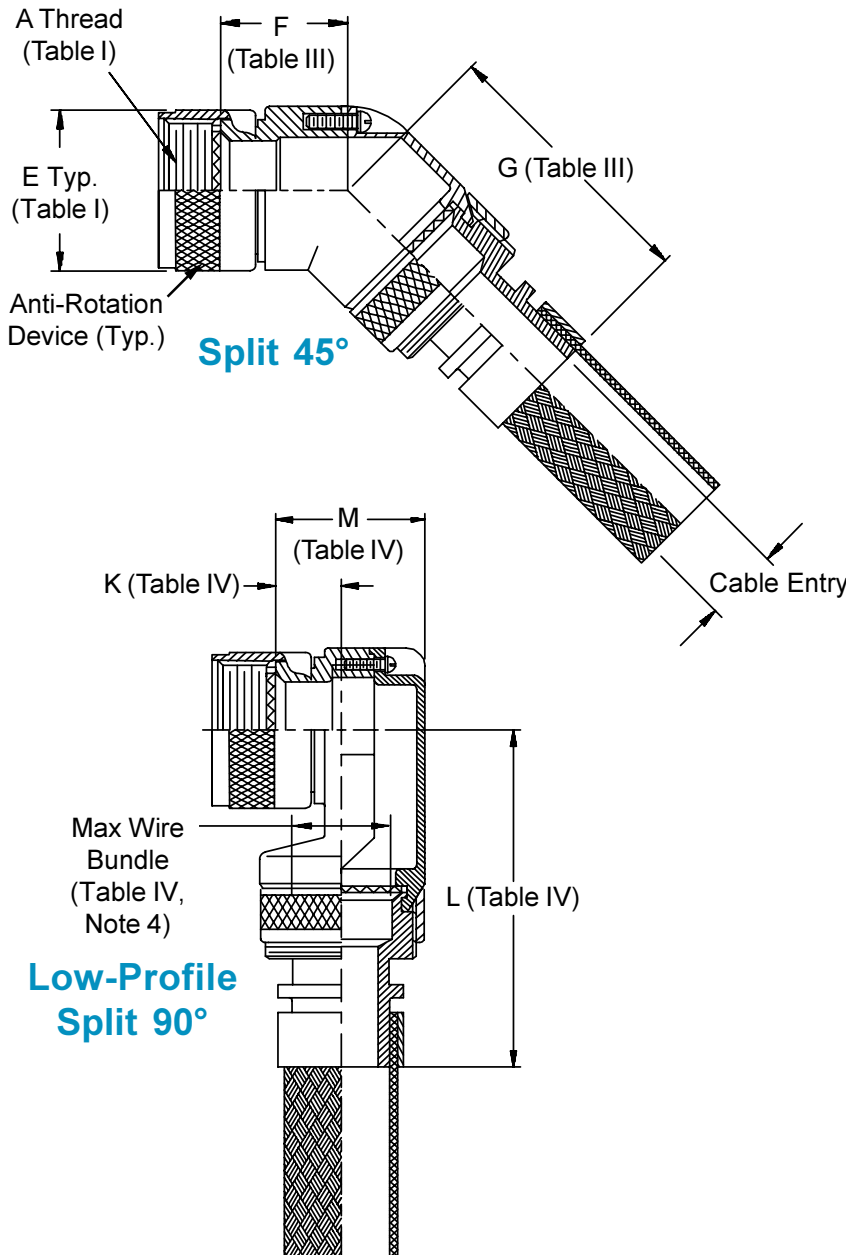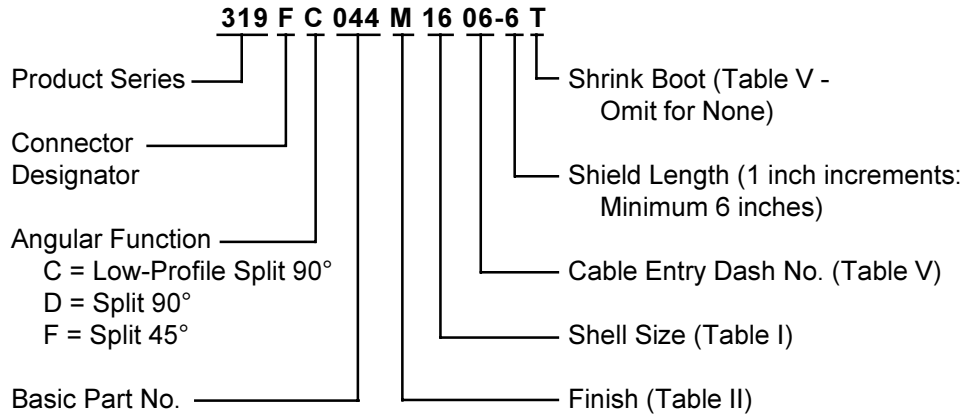

See inside back cover fold-out or pages 13 and 14 for Tables I and II.

| SHELL SIZE |    | F            | G            | H            | J            |
|------------|----|--------------|--------------|--------------|--------------|
| A-F-L-S    | H  | Max          | Max          | Max          | Max          |
| 08         | 09 | .596 (15.1)  | 1.500 (38.1) | .836 (21.2)  | 1.440 (36.6) |
| 10         | 11 | .656 (16.7)  | 1.560 (39.6) | .906 (23.0)  | 1.500 (38.1) |
| 12         | 13 | .716 (18.2)  | 1.630 (41.4) | .966 (24.5)  | 1.570 (39.9) |
| 14         | 15 | .776 (19.7)  | 1.660 (42.2) | 1.026 (26.1) | 1.600 (40.6) |
| 16         | 17 | .836 (21.2)  | 1.760 (44.7) | 1.086 (27.6) | 1.700 (43.2) |
| 18         | 19 | .906 (23.0)  | 1.820 (46.2) | 1.156 (29.4) | 1.760 (44.7) |
| 20         | 21 | .976 (24.8)  | 1.880 (47.8) | 1.216 (30.9) | 1.820 (46.2) |
| 22         | 23 | 1.036 (26.3) | 1.940 (49.3) | 1.276 (32.4) | 1.880 (47.8) |
| 24         | 25 | 1.096 (27.8) | 2.000 (50.8) | 1.336 (33.9) | 1.940 (49.3) |





| SHELL SIZE |    | K           | L            | M            | Max Wire Bundle |
|------------|----|-------------|--------------|--------------|-----------------|
| A-F-L-S    | H  | Ref.        | Max          | Max          |                 |
| 08         | 09 | .496 (12.6) | 1.780 (45.2) | .837 (21.3)  | .250 (6.4)      |
| 10         | 11 | .426 (10.8) | 1.940 (49.3) | .887 (22.5)  | .375 (9.5)      |
| 12         | 13 | .426 (10.8) | 1.940 (49.3) | .887 (22.5)  | .375 (9.5)      |
| 14         | 15 | .436 (11.1) | 2.010 (51.1) | .987 (25.1)  | .500 (12.7)     |
| 16         | 17 | .576 (14.6) | 2.060 (52.3) | 1.137 (28.9) | .625 (15.9)     |
| 18         | 19 | .796 (20.2) | 2.090 (53.1) | 1.337 (34.0) | .625 (15.9)     |
| 20         | 21 | .796 (20.2) | 2.090 (53.1) | 1.337 (34.0) | .625 (15.9)     |
| 22         | 23 | .696 (17.7) | 2.240 (56.9) | 1.337 (34.0) | .750 (19.1)     |
| 24         | 25 | .696 (17.7) | 2.240 (56.9) | 1.337 (34.0) | .750 (19.1)     |

| Dash No. | Cable Entry  | Shrink Boot * |
|----------|--------------|---------------|
| 01       | .188 (4.8)   | n/a           |
| 02       | .250 (6.4)   | 202K121-25-0  |
| 03       | .312 (7.9)   | 202K121-25-0  |
| 04       | .375 (9.5)   | 202K132-25-0  |
| 05       | .438 (11.1)  | 202K132-25-0  |
| 06       | .500 (12.7)  | 202K142-25-0  |
| 07       | .562 (14.3)  | 202K153-25-0  |
| 08       | .625 (15.9)  | 202K153-25-0  |
| 09       | .688 (17.5)  | 202K163-25-0  |
| 10       | .750 (19.1)  | 202K163-25-0  |
| 11       | .812 (20.6)  | 202K174-25-0  |
| 12       | .875 (22.2)  | 202K174-25-0  |
| 13       | .938 (23.8)  | 202K174-25-0  |
| 14       | 1.000 (25.4) | 202K185-25-0  |

\* Raychem Shrink Boot (Page 41) Supplied with "T" Option (see Part Number Development)

1. Cable Entry is defined as the accommodation range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.
2. See Shrink Boot Reference Information (see pages 40 and 41).
3. Metric dimensions (mm) are indicated in parentheses.
4. When maximum entry (page 21) is exceeded, Style 2 will be supplied (not available in Function C). Dimensions F, G, H & J will not apply. Please consult factory.

**CONNECTOR  
DESIGNATORS  
A-F-H-L-S  
ROTATABLE  
COUPLING**

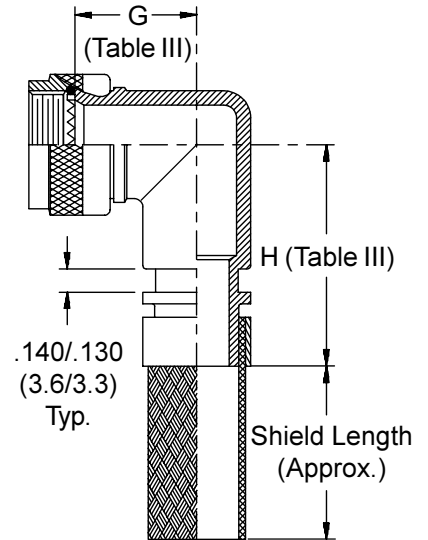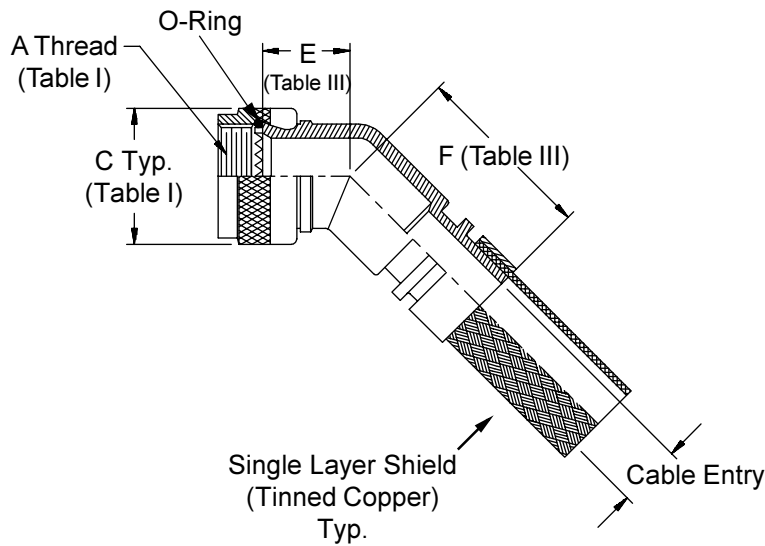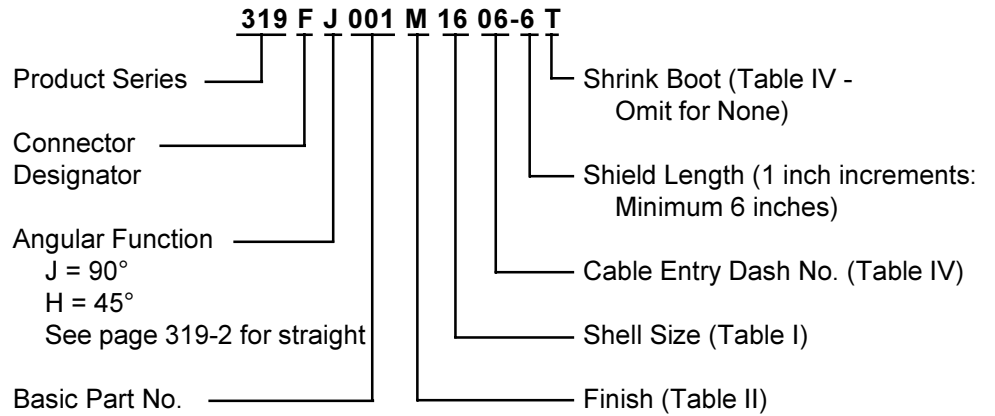

**STYLE 2  
(45° & 90°  
See Note 5)**

# Series 319 - Shrink Boot, EMI/RFI, Shield Sock



See inside back cover fold-out or pages 13 and 14 for Tables I and II.

| Shell Size   |    | E     |        | F     |        | G     |        | H     |        |
|--------------|----|-------|--------|-------|--------|-------|--------|-------|--------|
| Conn. Desig. | H  | Max   | (mm)   | Max   | (mm)   | Max   | (mm)   | Max   | (mm)   |
| A-F-L-S      |    |       |        |       |        |       |        |       |        |
| 08           | 09 | .830  | (21.1) | 1.045 | (26.5) | .940  | (23.9) | 1.155 | (29.3) |
| 10           | 11 | .860  | (21.8) | 1.075 | (27.3) | 1.010 | (25.7) | 1.225 | (31.1) |
| 12           | 13 | .882  | (22.4) | 1.097 | (27.9) | 1.070 | (27.2) | 1.285 | (32.6) |
| 14           | 15 | .900  | (22.9) | 1.125 | (28.6) | 1.130 | (28.7) | 1.345 | (34.2) |
| 16           | 17 | .930  | (23.6) | 1.145 | (29.1) | 1.190 | (30.2) | 1.405 | (35.7) |
| 18           | 19 | .950  | (24.1) | 1.165 | (29.6) | 1.240 | (31.5) | 1.455 | (37.0) |
| 20           | 21 | .980  | (24.9) | 1.195 | (30.4) | 1.310 | (33.3) | 1.525 | (38.7) |
| 22           | 23 | 1.000 | (25.4) | 1.215 | (30.9) | 1.360 | (34.5) | 1.575 | (40.0) |
| 24           | 25 | 1.030 | (26.2) | 1.245 | (31.6) | 1.430 | (36.3) | 1.645 | (41.8) |

| Dash No. | Cable Entry  | Shrink Boot * |
|----------|--------------|---------------|
| 01       | .188 (4.8)   | n/a           |
| 02       | .250 (6.4)   | 202K121-25-0  |
| 03       | .312 (7.9)   | 202K121-25-0  |
| 04       | .375 (9.5)   | 202K132-25-0  |
| 05       | .438 (11.1)  | 202K132-25-0  |
| 06       | .500 (12.7)  | 202K142-25-0  |
| 07       | .562 (14.3)  | 202K153-25-0  |
| 08       | .625 (15.9)  | 202K153-25-0  |
| 09       | .688 (17.5)  | 202K163-25-0  |
| 10       | .750 (19.1)  | 202K163-25-0  |
| 11       | .812 (20.6)  | 202K174-25-0  |
| 12       | .875 (22.2)  | 202K174-25-0  |
| 13       | .938 (23.8)  | 202K174-25-0  |
| 14       | 1.000 (25.4) | 202K185-25-0  |
| 15       | 1.250 (31.8) | 202K185-25-0  |
| 16       | 1.500 (38.1) | 202K185-25-0  |
| 17       | 1.750 (44.5) | n/a           |
| 18       | 2.000 (50.8) | n/a           |
| 19       | 1.125 (28.6) | n/a           |
| 20       | 1.375 (34.9) | n/a           |
| 21       | 1.625 (41.3) | n/a           |
| 22       | 1.062 (27.0) | n/a           |
| 23       | 1.188 (30.2) | n/a           |
| 24       | 1.875 (47.6) | n/a           |



\* Raychem Shrink Boot (Page 41)  
Supplied with "T" Option (see Part Number Development)

1. Cable Entry is defined as the accomodation range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.
2. See Shrink Boot Reference Information (pages 40 and 41).
3. Metric dimensions (mm) are indicated in parentheses.
4. O-Ring not supplied with Connector Designator A.
5. When maximum entry (page 21) is exceeded, Style 2 will be supplied. Dimensions E, F, G, & H will not apply. Please consult factory.




**CONNECTOR  
DESIGNATORS  
A-B\*-C-D-E-F  
G-H-J-K-L-S**

\* Conn. Desig. B See Note 6

**DIRECT  
COUPLING**

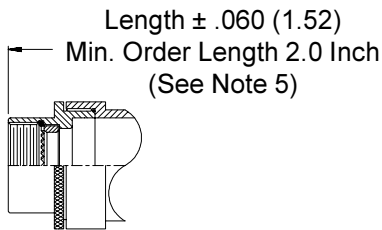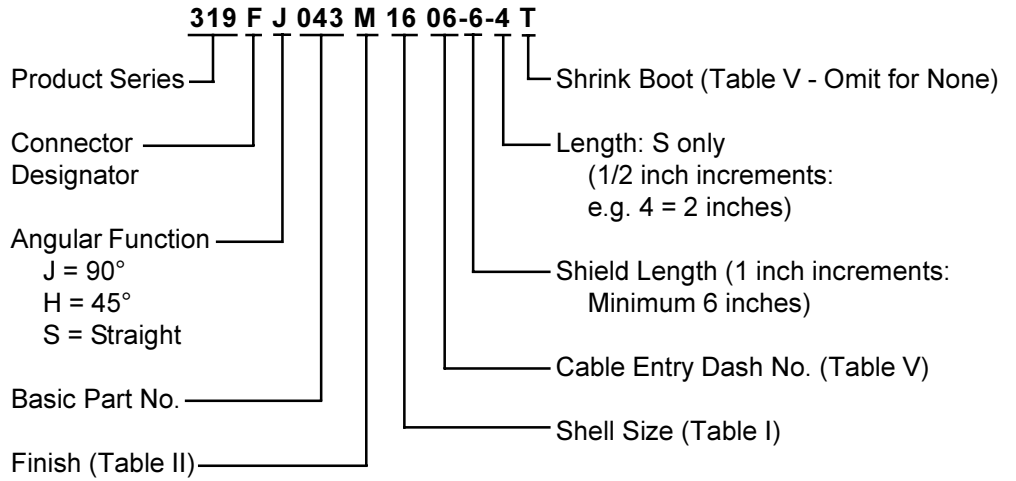

**STYLE 2  
(STRAIGHT  
See Note 7)**

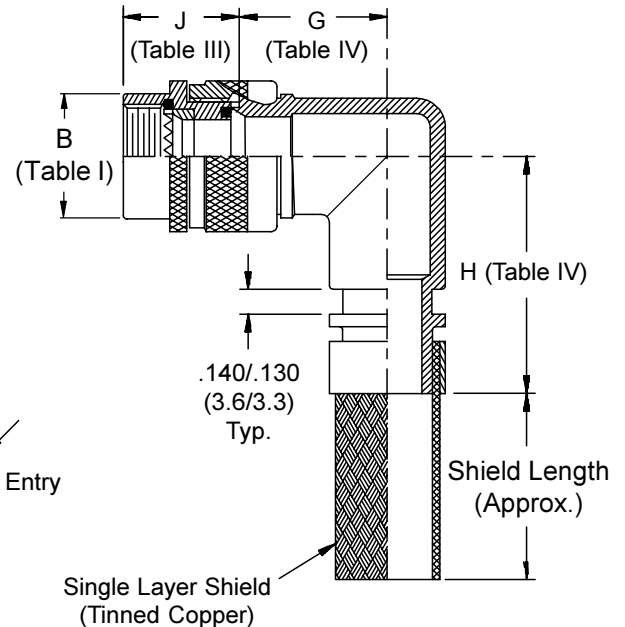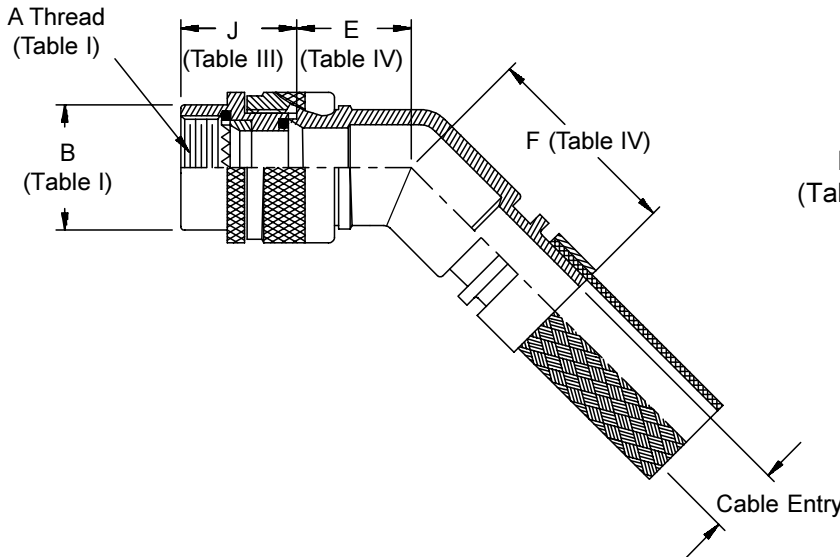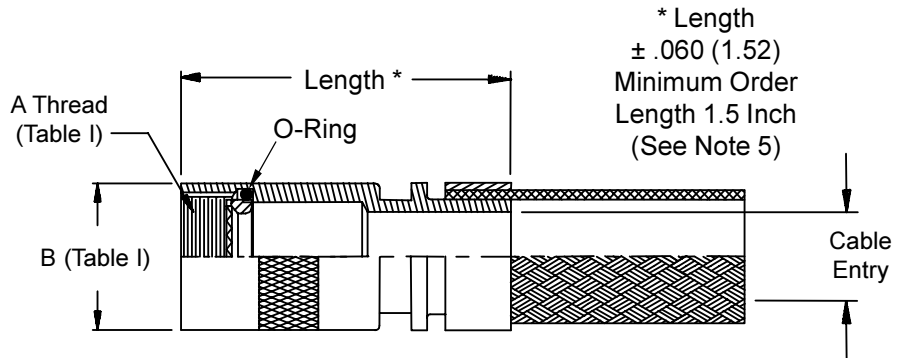

# Series 319 - Shrink Boot, EMI/RFI, Shield Sock



See inside back cover fold-out or pages 13 and 14 for Tables I and II.

| TABLE III  |                          |             |             |
|------------|--------------------------|-------------|-------------|
| Shell Size | J Max - Conn. Designator |             |             |
|            | A-D-E-F                  | B-G-K       | C           |
|            | H-J-L-S                  |             |             |
| 08/09      | 1.000(25.4)              | 1.000(25.4) |             |
| 10/11      | 1.000(25.4)              | 1.000(25.4) |             |
| 12/13      | 1.000(25.4)              | 1.000(25.4) | 1.735(44.1) |
| 14/15      | 1.000(25.4)              | 1.000(25.4) | 1.915(48.6) |
| 16/17      | 1.000(25.4)              | 1.166(29.6) | 1.915(48.6) |
| 18/19      | 1.000(25.4)              | 1.166(29.6) | 1.915(48.6) |
| 20/21      | 1.000(25.4)              | 1.166(29.6) | 1.915(48.6) |
| 22/23      | 1.000(25.4)              | 1.166(29.6) | 1.915(48.6) |
| 24/25      | 1.000(25.4)              | 1.166(29.6) | 1.915(48.6) |



| TABLE V  |             |        |               |
|----------|-------------|--------|---------------|
| Dash No. | Cable Entry |        | Shrink Boot * |
| 01       | .188        | (4.8)  | n/a           |
| 02       | .250        | (6.4)  | 202K121-25-0  |
| 03       | .312        | (7.9)  | 202K121-25-0  |
| 04       | .375        | (9.5)  | 202K132-25-0  |
| 05       | .438        | (11.1) | 202K132-25-0  |
| 06       | .500        | (12.7) | 202K142-25-0  |
| 07       | .562        | (14.3) | 202K153-25-0  |
| 08       | .625        | (15.9) | 202K153-25-0  |
| 09       | .688        | (17.5) | 202K163-25-0  |
| 10       | .750        | (19.1) | 202K163-25-0  |
| 11       | .812        | (20.6) | 202K174-25-0  |
| 12       | .875        | (22.2) | 202K174-25-0  |
| 13       | .938        | (23.8) | 202K174-25-0  |
| 14       | 1.000       | (25.4) | 202K185-25-0  |
| 15       | 1.250       | (31.8) | 202K185-25-0  |
| 16       | 1.500       | (38.1) | 202K185-25-0  |
| 17       | 1.750       | (44.5) | n/a           |
| 18       | 2.000       | (50.8) | n/a           |
| 19       | 1.125       | (28.6) | n/a           |
| 20       | 1.375       | (34.9) | n/a           |
| 21       | 1.625       | (41.3) | n/a           |
| 22       | 1.062       | (27.0) | n/a           |
| 23       | 1.188       | (30.2) | n/a           |
| 24       | 1.875       | (47.6) | n/a           |

\* Raychem Shrink Boot (Page 41)  
Supplied with "T" Option (see Part Number Development)



| TABLE IV |              |              |              |              |  |
|----------|--------------|--------------|--------------|--------------|--|
| Dash No. | E Max        | F Max        | G Max        | H Max        |  |
| 01       | .639 (16.2)  | .952 (24.2)  | .750 (19.1)  | 1.062 (27.0) |  |
| 02       | .664 (16.9)  | .982 (24.9)  | .810 (20.6)  | 1.122 (28.5) |  |
| 03       | .688 (17.5)  | 1.002 (25.5) | .870 (22.1)  | 1.182 (30.0) |  |
| 04       | .688 (17.5)  | 1.002 (25.5) | .870 (22.1)  | 1.182 (30.0) |  |
| 05       | .705 (17.9)  | 1.032 (26.2) | .920 (23.4)  | 1.252 (31.8) |  |
| 06       | .705 (17.9)  | 1.032 (26.2) | .920 (23.4)  | 1.252 (31.8) |  |
| 07       | .732 (18.6)  | 1.052 (26.7) | .980 (24.9)  | 1.312 (33.3) |  |
| 08       | .732 (18.6)  | 1.052 (26.7) | .980 (24.9)  | 1.312 (33.3) |  |
| 09       | .748 (19.0)  | 1.062 (27.0) | 1.020 (25.9) | 1.332 (33.8) |  |
| 10       | .773 (19.6)  | 1.082 (27.5) | 1.080 (27.4) | 1.392 (35.4) |  |
| 11       | .773 (19.6)  | 1.082 (27.5) | 1.080 (27.4) | 1.392 (35.4) |  |
| 12       | .800 (20.3)  | 1.122 (28.5) | 1.140 (29.0) | 1.472 (37.4) |  |
| 13       | .800 (20.3)  | 1.122 (28.5) | 1.140 (29.0) | 1.472 (37.4) |  |
| 14       | .823 (20.9)  | 1.152 (29.3) | 1.200 (30.5) | 1.542 (39.2) |  |
| 15       | 1.041 (26.4) | 1.322 (33.6) | 1.480 (37.6) | 1.782 (45.3) |  |
| 16       | 1.092 (27.7) | 1.362 (34.6) | 1.610 (40.9) | 1.872 (47.5) |  |
| 17       | 1.138 (28.9) | 1.412 (35.9) | 1.720 (43.7) | 1.982 (50.3) |  |
| 18       | 1.184 (30.1) | 1.452 (36.9) | 1.830 (46.5) | 2.092 (53.1) |  |
| 19       | .823 (20.9)  | 1.152 (29.3) | 1.200 (30.5) | 1.542 (39.2) |  |
| 20       | 1.041 (26.4) | 1.322 (33.6) | 1.480 (37.6) | 1.780 (45.2) |  |
| 21       | 1.092 (27.7) | 1.362 (34.6) | 1.610 (40.9) | 1.872 (47.5) |  |

1. Cable Entry or range is defined as the accommodation range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.
2. See Shrink Boot Reference Information (page 40 and 41).
3. Metric dimensions (mm) are indicated in parentheses.
4. O-Ring not supplied with Connector Designator A.
5. Consult factory for shorter lengths on straight backshells.
6. When using Connector Designator B refer to pages 18 and 19 for part number development.
7. When maximum cable entry (page 22) is exceeded, Style 2 will be supplied. (Function S only.)



**CONNECTOR DESIGNATORS**  
**A-F-H-L-S**  
**SELF-LOCKING ROTATABLE COUPLING**

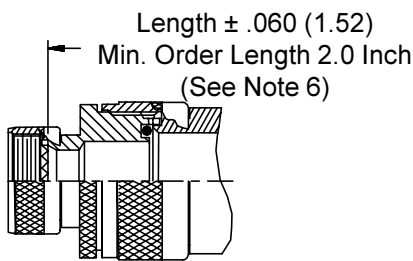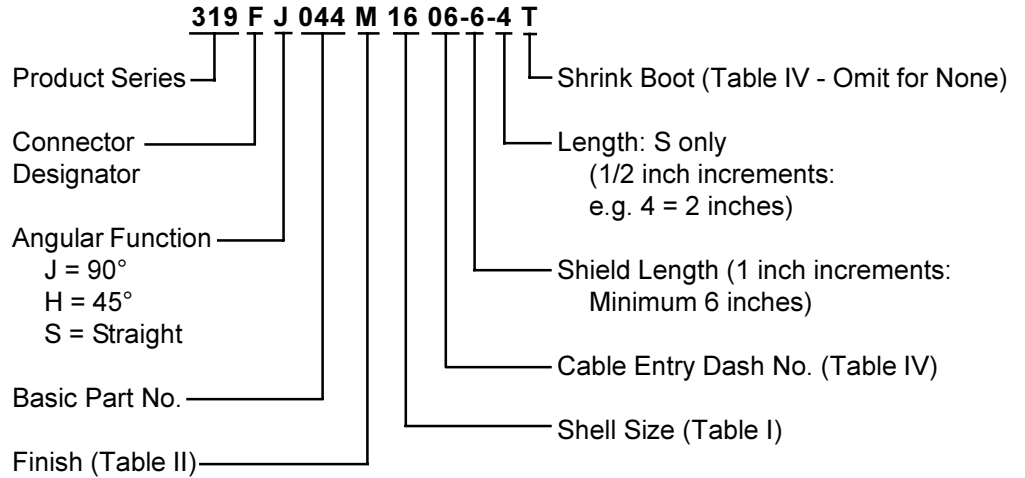

**STYLE 2 (STRAIGHT)**  
 See Note 5)

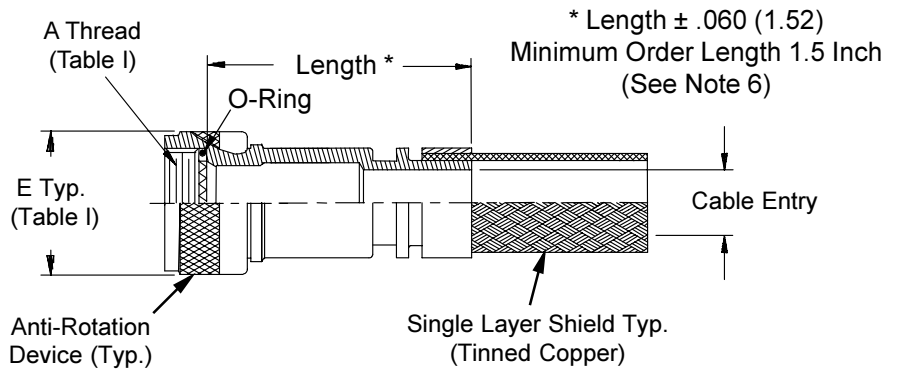

**STYLE 2 (45° & 90°)**  
 See Note 5)

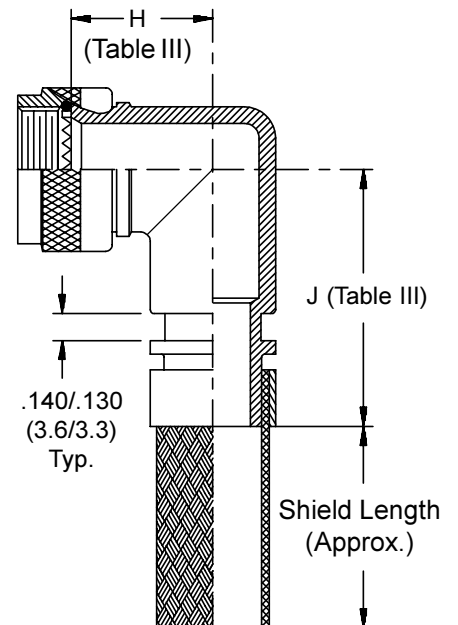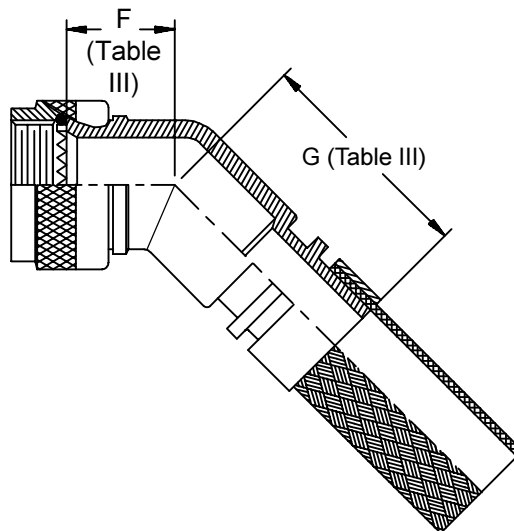

See inside back cover  
fold-out or pages 13 and  
14 for Tables I and II.



| Shell Size   |    | F     |        | G     |        | H     |        | J     |        |
|--------------|----|-------|--------|-------|--------|-------|--------|-------|--------|
| Conn. Desig. | H  | Max   | (mm)   | Max   | (mm)   | Max   | (mm)   | Max   | (mm)   |
| A-F-L-S      |    |       |        |       |        |       |        |       |        |
| 08           | 09 | .986  | (25.0) | 1.045 | (26.5) | 1.096 | (27.8) | 1.155 | (29.3) |
| 10           | 11 | 1.016 | (25.8) | 1.075 | (27.3) | 1.166 | (29.6) | 1.225 | (31.1) |
| 12           | 13 | 1.038 | (26.4) | 1.097 | (27.9) | 1.226 | (31.1) | 1.285 | (32.6) |
| 14           | 15 | 1.056 | (26.8) | 1.125 | (28.6) | 1.286 | (32.7) | 1.345 | (34.2) |
| 16           | 17 | 1.066 | (27.1) | 1.145 | (29.1) | 1.346 | (34.2) | 1.405 | (35.7) |
| 18           | 19 | 1.106 | (28.1) | 1.165 | (29.6) | 1.396 | (35.5) | 1.455 | (37.0) |
| 20           | 21 | 1.136 | (28.9) | 1.195 | (30.4) | 1.466 | (37.2) | 1.525 | (38.7) |
| 22           | 23 | 1.156 | (29.4) | 1.215 | (30.9) | 1.516 | (38.5) | 1.575 | (40.0) |
| 24           | 25 | 1.186 | (30.1) | 1.245 | (31.6) | 1.586 | (40.3) | 1.645 | (41.8) |

| Dash No. | Cable Entry  | Shrink Boot * |
|----------|--------------|---------------|
| 01       | .188 (4.8)   | n/a           |
| 02       | .250 (6.4)   | 202K121-25-0  |
| 03       | .312 (7.9)   | 202K121-25-0  |
| 04       | .375 (9.5)   | 202K132-25-0  |
| 05       | .438 (11.1)  | 202K132-25-0  |
| 06       | .500 (12.7)  | 202K142-25-0  |
| 07       | .562 (14.3)  | 202K153-25-0  |
| 08       | .625 (15.9)  | 202K153-25-0  |
| 09       | .688 (17.5)  | 202K163-25-0  |
| 10       | .750 (19.1)  | 202K163-25-0  |
| 11       | .812 (20.6)  | 202K174-25-0  |
| 12       | .875 (22.2)  | 202K174-25-0  |
| 13       | .938 (23.8)  | 202K174-25-0  |
| 14       | 1.000 (25.4) | 202K185-25-0  |
| 15       | 1.250 (31.8) | 202K185-25-0  |
| 16       | 1.500 (38.1) | 202K185-25-0  |
| 17       | 1.750 (44.5) | n/a           |
| 18       | 2.000 (50.8) | n/a           |
| 19       | 1.125 (28.6) | n/a           |
| 20       | 1.375 (34.9) | n/a           |
| 21       | 1.625 (41.3) | n/a           |
| 22       | 1.062 (27.0) | n/a           |
| 23       | 1.188 (30.2) | n/a           |
| 24       | 1.875 (47.6) | n/a           |




\* Raychem Shrink Boot (Page 41)  
Supplied with "T" Option (see Part Number Development)

1. Cable Entry is defined as the accommodation range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.
2. See Shrink Boot Reference Information (pages 40 and 41).
3. Metric dimensions (mm) are indicated in parentheses.
4. O-Ring not supplied with Connector Designator A.
5. When maximum entry (page 21) is exceeded, Style 2 will be supplied. Dimensions F, G, H & J will not apply. Please consult factory.
6. Consult factory for shorter lengths on straight backshells.


**CONNECTOR  
DESIGNATORS  
A-F-H-L-S  
ROTATABLE  
COUPLING**

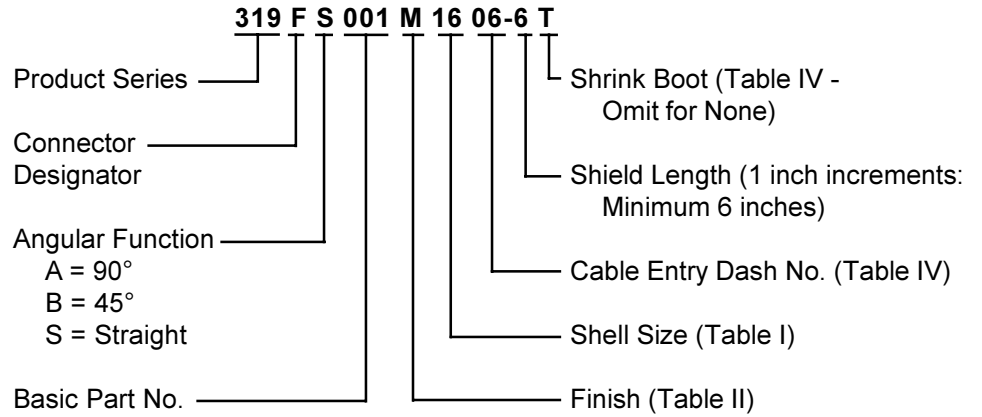

**STYLE 2  
(STRAIGHT  
See Note 5)**

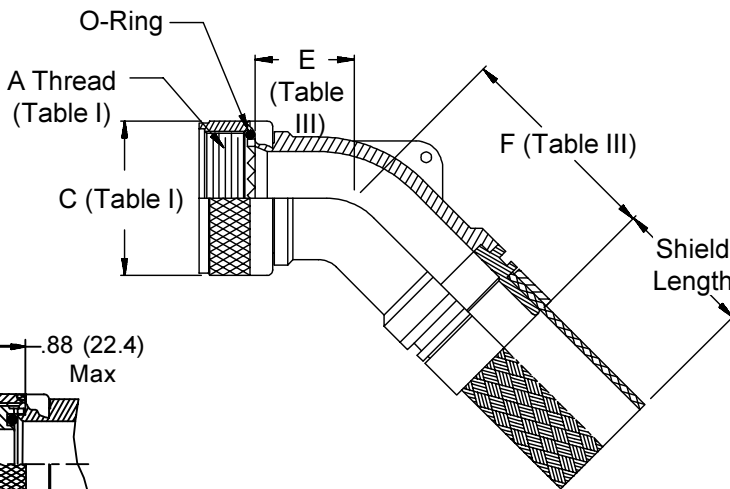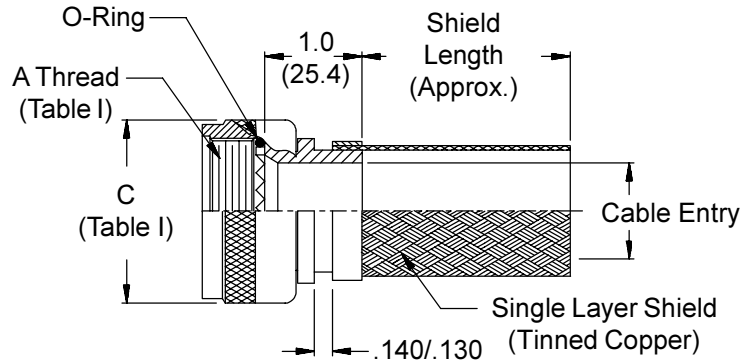

**STYLE 2  
(45° & 90°  
See Note 5)**

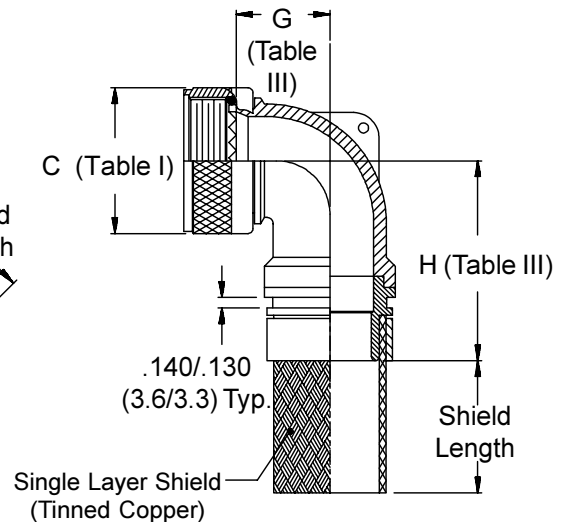

See inside back cover fold-out or pages 13 and 14 for Tables I and II.

| Shell Size   |    | E     |        | F     |        | G     |        | H     |        |
|--------------|----|-------|--------|-------|--------|-------|--------|-------|--------|
| Conn. Desig. | H  | Max   |        | Max   |        | Max   |        | Max   |        |
| A-F-L-S      |    |       |        |       |        |       |        |       |        |
| 08           | 09 | .457  | (11.6) | 1.710 | (43.4) | .500  | (12.7) | 1.730 | (43.9) |
| 10           | 11 | .520  | (13.2) | 1.770 | (45.0) | .595  | (15.1) | 1.850 | (47.0) |
| 12           | 13 | .582  | (14.8) | 1.830 | (46.5) | .610  | (15.5) | 1.870 | (47.5) |
| 14           | 15 | .645  | (16.4) | 1.920 | (48.8) | .700  | (17.8) | 1.940 | (49.3) |
| 16           | 17 | .738  | (18.7) | 2.030 | (51.6) | .885  | (22.5) | 2.030 | (51.6) |
| 18           | 19 | .926  | (23.5) | 2.220 | (56.4) | .975  | (24.8) | 2.200 | (55.9) |
| 20           | 21 | .926  | (23.5) | 2.220 | (56.4) | .975  | (24.8) | 2.200 | (55.9) |
| 22           | 23 | 1.020 | (25.9) | 2.370 | (60.2) | 1.125 | (28.6) | 2.310 | (58.7) |
| 24           | 25 | 1.020 | (25.9) | 2.370 | (60.2) | 1.125 | (28.6) | 2.310 | (58.7) |
| 28           |    | 1.145 | (29.1) | 2.420 | (61.5) | 1.225 | (31.1) | 2.480 | (63.0) |
| 32           |    | 1.207 | (30.7) | 2.520 | (64.0) | 1.575 | (40.0) | 2.730 | (69.3) |
| 36           |    | 1.238 | (31.4) | 2.610 | (66.3) | 1.775 | (45.1) | 2.730 | (69.3) |

| Dash No. | Cable Entry  | Shrink Boot * |
|----------|--------------|---------------|
| 01       | .188 (4.8)   | n/a           |
| 02       | .250 (6.4)   | 202K121-25-0  |
| 03       | .312 (7.9)   | 202K121-25-0  |
| 04       | .375 (9.5)   | 202K132-25-0  |
| 05       | .438 (11.1)  | 202K132-25-0  |
| 06       | .500 (12.7)  | 202K142-25-0  |
| 07       | .562 (14.3)  | 202K153-25-0  |
| 08       | .625 (15.9)  | 202K153-25-0  |
| 09       | .688 (17.5)  | 202K163-25-0  |
| 10       | .750 (19.1)  | 202K163-25-0  |
| 11       | .812 (20.6)  | 202K174-25-0  |
| 12       | .875 (22.2)  | 202K174-25-0  |
| 13       | .938 (23.8)  | 202K174-25-0  |
| 14       | 1.000 (25.4) | 202K185-25-0  |
| 15       | 1.250 (31.8) | 202K185-25-0  |
| 16       | 1.500 (38.1) | 202K185-25-0  |
| 17       | 1.750 (44.5) | n/a           |
| 18       | 2.000 (50.8) | n/a           |
| 19       | 1.125 (28.6) | n/a           |
| 20       | 1.375 (34.9) | n/a           |
| 21       | 1.625 (41.3) | n/a           |
| 22       | 1.062 (27.0) | n/a           |
| 23       | 1.188 (30.2) | n/a           |
| 24       | 1.875 (47.6) | n/a           |

\* Raychem Shrink Boot (Page 41)  
Supplied with "T" Option (see Part Number Development)

1. Cable Entry or range is defined as the accomodation range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.
2. See Shrink Boot Reference Information (pages 40 & 41).
3. Metric dimensions (mm) are indicated in parentheses.
4. O-Ring not supplied with Connector Designator A.
5. When maximum entry (page 21) is exceeded, Style 2 will be supplied. Dimensions E, F, G, & H will not apply. Please consult factory.