

Helatag 860, 880 labels for control panel identification

Features and Benefits


These labels can be used for both permanent and temporary labelling. They have good adhesion characteristics for most surface types, and they are ideal for use in areas such as repair and extension of control cabinets and control units.

Material 880 can be removed without leaving a sticky residue.

For problem-free printing, we recommend Tagprint PRO software.



Helatag 860 switchgear application.



Thermal Transfer Printer

Material Data	
Material	Type 860, Vinyl, yellow gloss (YE)
Operating Temperature	-40 °C to +80 °C
Curing Temperature	From +10 °C
Adhesive	Acrylic
Thickness of Foil (TF)	64.0
Chem. Material Properties	Excellent resistance to alcohol, gasoline, cleaning solvents, butanol, ethyl and Butylcellosolve solvent, battery acid, UV light.

Material Data	
Material	Type 880, Vinyl, yellow matt (YE)
Operating Temperature	-40 °C to +80 °C
Curing Temperature	From +10 °C
Adhesive	Acrylic
Thickness of Foil (TF)	64.0
Chem. Material Properties	resistant to oils, water and solvents

Technical Table							
Article-No.	Type	Colour	Width (W)	Height (H)	Width of Liner (WL)	Labels per Row	Pack Cont.
Thermal Transfer - Plain Labels, Material 860							
596-53860	TAG15-09TE-860-YE	Yellow gloss (YE)	15.00	9.00	89.0	5	10000
596-51860	TAG16-06TE-860-YE	Yellow gloss (YE)	16.50	6.00	101.60	5	20000
596-54860	TAG19-11TE-860-YE	Yellow gloss (YE)	19.00	11.00	89.0	4	10000
596-52860	TAG20-08TE-860-YE	Yellow gloss (YE)	20.00	8.00	101.60	4	10000
596-55860	TAG38-11TE-860-YE	Yellow gloss (YE)	38.00	11.00	85.09	2	5000
596-56860	TAG56-22TE-860-YE	Yellow gloss (YE)	56.00	22.00	62.0	1	2000

All dimensions in mm. Subject to technical changes.

Technical Table							
Article-No.	Type	Colour	Width (W)	Height (H)	Width of Liner (WL)	Labels per Row	Pack Cont.
Thermal Transfer - Plain Labels, Material 880							
596-53880	TAG15-09TE-880-YE	Yellow matt (YE)	15.00	9.00	89.0	5	10000
596-51880	TAG16-06TE-880-YE	Yellow matt (YE)	16.50	6.00	101.60	5	20000
596-54880	TAG19-11TE-880-YE	Yellow matt (YE)	19.00	11.00	89.0	4	10000
596-52880	TAG20-08TE-880-YE	Yellow matt (YE)	20.00	8.00	101.60	4	10000
596-55880	TAG38-11TE-880-YE	Yellow matt (YE)	38.00	11.00	85.09	2	5000
596-56880	TAG56-22TE-880-YE	Yellow matt (YE)	56.00	22.00	62.0	1	2000


All dimensions in mm. Subject to technical changes.

Helatag 253 labels for terminal block identification

Features and Benefits

These white labels give excellent contrast and are suitable for clear and permanent identification of control panels. Available sizes are designed to cover the needs of most manufacturers. Further sizes are available on request.


For problem-free printing, we recommend Tagprint PRO software.



Thermal Transfer Printer




Clear and permanent identification.



Helatag plain labels

Material Data

	Material	Type 892, Vinyl white (WH)
	Operating Temperature	-40 °C to +80 °C
	Curing Temperature	From +10 °C
	Adhesive	Acrylic
	Thickness of Foil (TF)	83
	Chem. Material Properties	Contains no PVC. Resistant to oils, water, solvents, alcohol and petrol

Technical Table

Article-No.	Type	Colour	Width (W)	Height (H)	Width of Liner (WL)	Labels per Row	Pack Cont.
596-51253	TAG05-08TC-892-WH	White (WH)	5.00	8.00	85.00	16	25000
596-54253	TAG05-10TC-892-WH	White (WH)	5.00	10.00	85.00	16	25000
596-57253	TAG05-15TC-892-WH	White (WH)	5.00	15.00	85.00	16	25000
596-52253	TAG06-08TC-892-WH	White (WH)	6.00	8.00	85.00	13	25000
596-55253	TAG06-10TC-892-WH	White (WH)	6.00	10.00	85.00	13	25000
596-58253	TAG06-15TC-892-WH	White (WH)	6.00	15.00	85.00	13	25000
596-53253	TAG08-08TC-892-WH	White (WH)	8.00	8.00	85.00	10	25000
596-56253	TAG08-10TC-892-WH	White (WH)	8.00	10.00	85.00	10	25000
596-59253	TAG08-15TC-892-WH	White (WH)	8.00	15.00	85.00	10	25000

All dimensions in mm. Subject to technical changes.

Control panel labelling (YE), laser - Material 710


Features and Benefits

These DIN A4 labels give crisp and clear text, barcodes and graphics can be printed by any standard office laser printer. This gives users the ability to print high-resolution graphics as well as manage short label production volumes.

The yellow material gives excellent contrast to the printed data.


The labels are supplied in a protective box that ensures labels are kept as good as new.

For problem-free printing, we recommend Tagprint PRO software.

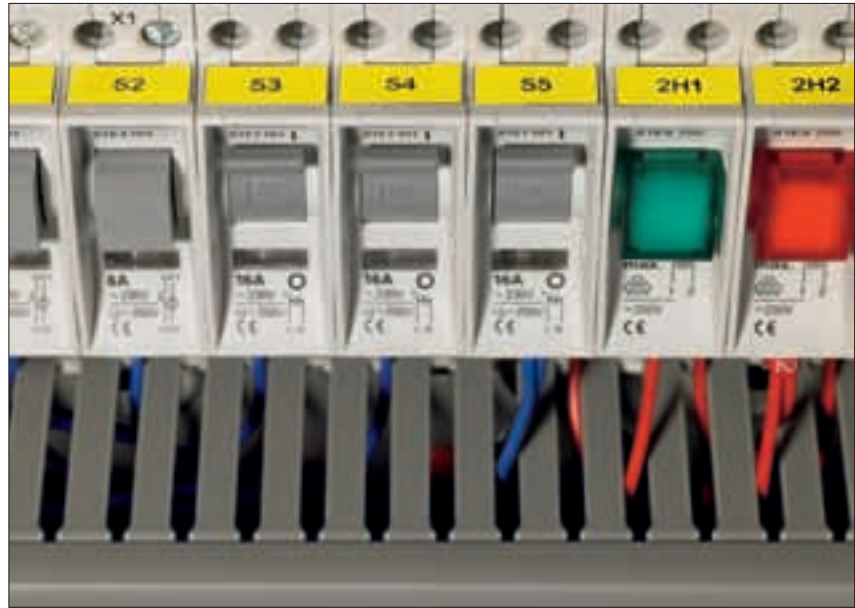

Clearly identified labels ensure easy network wire and cable management.

Material Data	
Material	Type 710, Polyester, yellow (YE)
Operating Temperature	-40 °C to +150 °C
Curing Temperature	from +5 °C
Adhesive	Acrylic
Thickness of Foil (TF)	64.0
Chem. Material Properties	Excellent resistance to alcohol, gasoline, cleaning solvents, butanol, ethyl and Butylcellosolve solvent, battery acid, UV light.



Laser Printer

Technical Table							
Article-No.	Type	Colour	Width (W)	Height (H)	Labels per Sheet	Sheets per Pack	Pack Cont.
594-12271	TAG122LA4-710-YE	Yellow (YE)	15.00	9.00	372	27	10000
594-12071	TAG120LA4-710-YE	Yellow (YE)	15.24	6.35	528	19	10000
594-15471	TAG154LA4-710-YE	Yellow (YE)	17.00	9.00	341	30	10000
594-12471	TAG124LA4-710-YE	Yellow (YE)	19.00	11.00	260	20	5000
594-13710	TAG13LA4-710-YE	Yellow (YE)	19.05	6.35	440	23	10000
594-12171	TAG121LA4-710-YE	Yellow (YE)	20.00	8.00	315	32	10000
594-15271	TAG152LA4-710-YE	Yellow (YE)	22.90	6.35	352	29	10000
594-14710	TAG14LA4-710-YE	Yellow (YE)	25.40	9.50	210	24	5000
594-12671	TAG126LA4-710-YE	Yellow (YE)	30.00	20.00	84	30	2500
594-62710	TAG62LA4-710-YE	Yellow (YE)	31.75	9.50	180	28	5000

All dimensions in mm. Subject to technical changes.

Control Panel labelling (WH), laser - Material 720

Features and Benefits

These DIN A4 labels give crisp and clear text, barcodes and graphics can be printed by any standard office laser printer. This gives users the ability to print high-resolution graphics as well as manage short label production volumes. The option to use colour laser printers on this material is an option that needs to be fully tested before batch production commences.


The white material gives excellent contrast to the printed data.

The labels are supplied in a protective box that ensures labels are kept as good as new.


For problem-free printing, we recommend Tagprint PRO software.



Clearly identified labels ensure easy network wire and cable management.



Laser Printer



Material Data	
Material	Type 720, Polyester, white (WH)
Operating Temperature	-40 °C to +150 °C
Curing Temperature	from +5 °C
Adhesive	Acrylic
Thickness of Foil (TF)	64.0
Chem. Material Properties	Excellent resistance to alcohol, gasoline, cleaning solvents, butanol, ethyl and Butylcellosolve solvent, battery acid, UV light.

Technical Table						
Article-No.	Type	Width (W)	Height (H)	Labels per Sheet	Sheets per Pack	Pack Cont.
594-15672	TAG156LA4-720-WH	10.16	10.16	532	19	10000
594-15972	TAG159LA4-720-WH	12.70	12.70	330	16	5000
594-12272	TAG122LA4-720-WH	15.00	9.00	372	27	10000
594-12072	TAG120LA4-720-WH	15.24	6.35	528	19	10000
594-11720	TAG111LA4-720-WH	16.50	5.08	605	17	10000
594-15472	TAG154LA4-720-WH	17.00	9.00	341	30	10000
594-12472	TAG124LA4-720-WH	19.00	11.00	260	20	5000
594-13720	TAG131LA4-720-WH	19.05	6.35	440	23	10000
594-12172	TAG121LA4-720-WH	20.00	8.00	315	32	10000
594-16072	TAG160LA4-720-WH	20.60	12.70	198	26	5000
594-15272	TAG152LA4-720-WH	22.90	6.35	352	29	10000
594-15572	TAG155LA4-720-WH	25.40	8.47	231	22	5000
594-14720	TAG141LA4-720-WH	25.40	9.50	210	24	5000
594-15720	TAG151LA4-720-WH	25.40	12.70	154	33	5000
594-16772	TAG167LA4-720-WH	25.40	25.40	77	33	2500
594-12672	TAG126LA4-720-WH	30.00	20.00	84	30	2500
594-62720	TAG62LA4-720-WH	31.75	9.50	180	28	5000
594-15372	TAG153LA4-720-WH	38.10	6.35	220	23	5000
594-16272	TAG162LA4-720-WH	38.10	12.70	110	23	2500
594-17372	TAG173LA4-720-WH	185.00	3.80	20	50	1000


All dimensions in mm. Subject to technical changes.

HELASIGN - Cotton Cloth Booklet

The bright yellow cotton labels are supplied with or without a black border in handy pocket sized booklets. For fast on-site identification of component parts, switching devices and other operating equipment. The labels are resistant to oils, water and dust and can be removed without leaving a sticky residue. Labels can even be applied to uneven surfaces and are available in different sizes from 15 x 6mm to 38 x 11mm. The booklet covers act as an effective barrier to dust and dirt so your labels remain clean before use. An applicator tool is supplied with every HELASIGN booklet for clean application of the labels (e.g. with dirty hands). For professional hand inscriptions we recommend the T82 marker pen which has fast-drying and UV-resistant ink.



Always on hand: Labels in a convenient, pocket sized and lightweight booklet.



Material Data	
Material	Type 270, Cotton cloth, yellow (YE)
Colour	Yellow (YE)
Operating Temperature	-40 °C to +121 °C
Curing Temperature	From +4 °C
Adhesive	Synthetic rubber

Technical Table					
Article-No.	Type	Colour	Width (W)	Height (H)	Quantity perbook
Fabric labels without border					
598-12027	TAG120B-270-YE	Yellow (YE)	15.00	6.00	1050
598-12127	TAG121B-270-YE	Yellow (YE)	20.00	8.00	600
598-12227	TAG122B-270-YE	Yellow (YE)	15.00	9.00	700
598-12427	TAG124B-270-YE	Yellow (YE)	19.00	11.00	440
Fabric labels with border					
598-92127	TAG121FB-270-YE	Yellow (YE)	20.00	8.00	600
598-92227	TAG122FB-270-YE	Yellow (YE)	15.00	9.00	700
598-92427	TAG124FB-270-YE	Yellow (YE)	19.00	11.00	440
598-92527	TAG125FB-270-YE	Yellow (YE)	38.00	11.00	220
Marker pens T82					
500-50820	T82S-BK	Black (BK)	-		
500-50822	T82R-RD	Red (RD)	-		

All dimensions in mm. Subject to technical changes.

Control Panel labelling (YE), A4 sheet, handwriting - Material 270


Features and Benefits

These labels are manufactured from a robust cotton fabric which is easily inscribed and applied. Text remains permanently legible and will not smudge or run. These labels can be removed without leaving a sticky residue. Labels are supplied on A4 sheets with or without a black border. For professional hand inscriptions we recommend the T82 marker pen which has fast-drying and UV-resistant ink.

Please note: These labels are not suitable for laser printing.



Helatag cotton fabric labels will adhere to most surfaces.



Helatag plain labels

Material Data	
Material	Type 270, Cotton cloth, yellow (YE)
Adhesive	Synthetic rubber
Thickness of Foil (TF)	150.0
Operating Temperature	-40 °C to +121 °C
Curing Temperature	From +4 °C
Chem. Material Properties	resistant to oils and water, removable without residue

Technical Table						
Article-No.	Type	Colour	Width (W)	Height (H)	Labels per Sheet	Quantity per Pack
Handwritable, Fabric labels, yellow						
597-12027	TAG120A4-270-YE	Yellow (YE)	15.00	6.00	611	15275
597-12127	TAG121A4-270-YE	Yellow (YE)	20.00	8.00	315	7875
597-12227	TAG122A4-270-YE	Yellow (YE)	15.00	9.00	348	9300
597-12327	TAG123A4-270-YE	Yellow (YE)	26.00	10.00	196	4900
597-12427	TAG124A4-270-YE	Yellow (YE)	19.00	11.00	260	6500
597-12527	TAG125A4-270-YE	Yellow (YE)	38.00	11.00	130	3250
597-12627	TAG126A4-270-YE	Yellow (YE)	30.00	20.00	36	2100
597-12727	TAG127A4-270-YE	Yellow (YE)	56.00	22.00	39	975
597-12827	TAG128A4-270-YE	Yellow (YE)	60.00	35.00	24	600
Handwritable, Fabric labels, yellow with black border						
597-92127	TAG121FA4-270-YE	Yellow (YE)	20.00	8.00	315	7875
597-92227	TAG122FA4-270-YE	Yellow (YE)	15.00	9.00	348	9300
597-92427	TAG124FA4-270-YE	Yellow (YE)	19.00	11.00	260	6500
597-92527	TAG125FA4-270-YE	Yellow (YE)	38.00	11.00	130	3250
597-92727	TAG127FA4-270-YE	Yellow (YE)	56.00	22.00	39	975
597-92827	TAG128FA4-270-YE	Yellow (YE)	60.00	35.00	24	600
Marker pens T82						
500-50820	T82S-BK	Black (BK)	-	-	-	2
500-50822	T82R-RD	Red (RD)	-	-	-	2

All dimensions in mm. Subject to technical changes.

**Control Panel labelling (WH),
A4 sheet, handwriting -
Material 265**


Features and Benefits

These labels are manufactured from a robust cotton fabric which is easily inscribed and applied. Text remains permanently legible and will not smudge or run. These labels can be removed without leaving a sticky residue. Labels are supplied on A4 sheets with or without a black border. For professional hand inscriptions we recommend the T82 marker pen which has fast-drying and UV-resistant ink.

Please note: These labels are not suitable for laser printing.



Helatag cotton fabric labels will adhere to most surfaces.



Helatag plain labels

Material Data	
Material	Type 265, Cotton cloth, white (WH)
Adhesive	Synthetic rubber
Thickness of Foil (TF)	150.0
Operating Temperature	-40 °C to +121 °C
Curing Temperature	From +4 °C
Chem. Material Properties	resistant to oils and water, removable without residue

Technical Table						
Article-No.	Type	Colour	Width (W)	Height (H)	Labels per Sheet	Quantity per Pack
Handwritable, Fabric labels, white with black border						
597-92426	TAG124FA4-265-WH	White (WH)	19.00	11.00	240	6000
597-92526	TAG125FA4-265-WH	White (WH)	38.00	11.00	120	3000
597-92626	TAG126FA4-265-WH	White (WH)	30.00	20.00	36	900
Marker pens T82						
500-50820	T82S-BK	Black (BK)	-	-		2
500-50822	T82R-RD	Red (RD)	-	-		2

All dimensions in mm. Subject to technical changes.



Marker pens T82S-BK and T82R-RD.