

L754 MINIATURE CERAMIC FUSE LINKS





These size 00 (15.9mm x 4.7mm), sand filled fuse links have a high rupturing capacity and a category duty of 250V a.c. or 250V d.c. (Maximum prospective overload 4000A at 0.4pf and 250Va.c. and 230 V d.c. Time constant 0.004s.)

- MINIMUM LIFE:** 1,000 hours at rated current at temperatures up to 35°C. 1,000 hours continuous at 80% of rated current at temperatures beyond 35°C to 85°C.
- TEMPERATURE RANGE:** -60°C to +85°C
- MARKING:** Body marked with rating and approved versions carry the Joint Services' reference number
- WEIGHT:** 0.85g

ORDERING REFERENCE: L754/CURRENT RATING IN AMPERES

AVAILABLE IN : 50mA, 100mA, *250mA, *500mA, *1A, *2A
* Qualification Approved

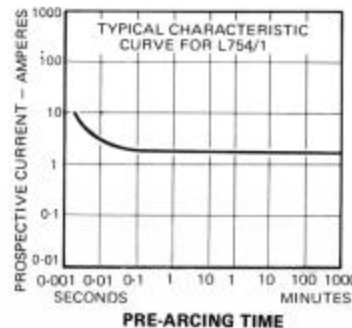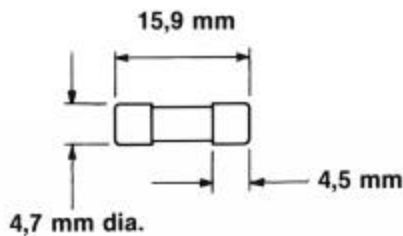

BLP reserve the right to change without prior notice the information contained within this leaflet

Dialight BLP Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England
Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: sales@blpcomp.com <http://www.blpcomp.com>

L754 PCB MOUNTING FUSELINKS



These fuselinks are designed for direct mounting into printed circuit boards and are available as H.R.C. ceramic types.

The H.R.C. ceramic fuselinks protect against high prospective overload currents and are therefore suited for application in hazardous environments such as those encountered in the petro-chemical and mining industries. Marking on the fuselink body includes the rating which is visible when the fuselink is mounted on the P.C. board.

BREAKING CAPACITY

4000A at 0.4 power factor and 250V a.c. or 230V d.c. (Time constant 0.004s).

MINIMUM LIFE:

1,000 hours continuous rated current at temperatures of up to 35°C. 1000 hours continuous at 80% of rated current at temperatures beyond 35°C up to 85°C.

TEMPERATURE RANGE:

-60°C to +85°C (ambient)

CURRENT RATINGS:

50mA, 100mA, 250mA, 500mA, 1A, 2A



MATERIALS: BODY:

Ceramic

CONTACTS:

Brass, tin plated

ORDERING REFERENCE: L754/PCB/CURRENT RATING IN AMPERES

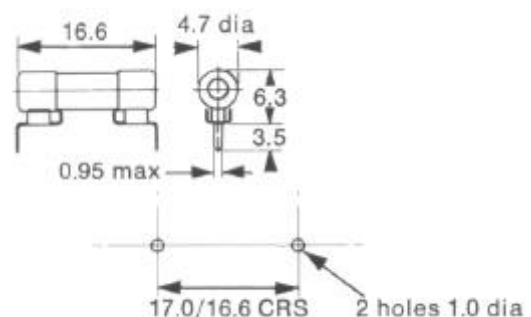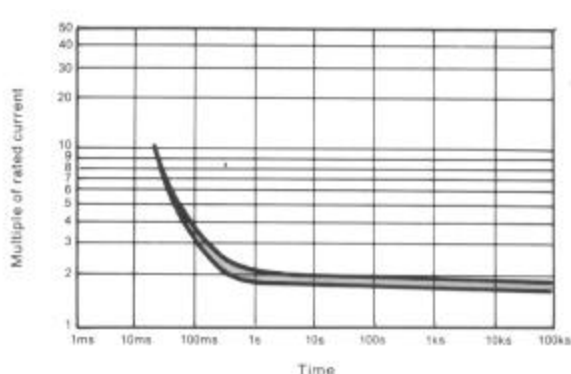

Dialight BLP reserve the right to change without prior notice the information contained within this leaflet

Dialight BLP Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England
Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: sales@blpcomp.com <http://www.blpcomp.com>